



Installation & Operating Instructions

For Half Wall Lantern - 3 sided

Models: PL3B & PL3W

Thank you for purchasing a quality KingShield Half Wall Lantern. Please read these instructions fully prior to initial use.

Every effort has been made to ensure that the guidance information on this sheet will enable the installation of the Lantern to be carried out safely and correctly.

IMPORTANT

This product should be installed by a competent person and in accordance with the current IEE Wiring Regulations. If in doubt, consult a qualified electrician.

SAFETY INFORMATION

Always switch off mains supply before servicing, fitting or replacing lamps. Always check the lamp is correct for the application, including its voltage and wattage. Never exceed the maximum wattage. Ensure the lamp is correctly located in the lampholder.


INSTALLATION INSTRUCTIONS

1. Remove screws (2 off) securing front cover.
2. Hold the back cover up to the wall in the desired fixing position, mark hole positions. This fitting should not be fitted to wet or damp surfaces such as freshly plastered or painted walls.
3. Drill holes on the points marked on the wall in step 2, use an $\varnothing 8\text{mm}$ drill bit and insert rawl plugs prior to screwing into position.
4. Cut a hole in the rubber grommet in the back cover and feed the mains cable through.
5. Connect the live and neutral cables to the 3-way terminal block and then relocate the connector onto the back cover, see fig.2 for details. NOTE: Earth terminal is provided for convenience as this is a class II product.
6. Secure back cover in desired position using the holes drilled in step 3, screws supplied.
7. Screw lamp (Halogen 42W or CFL 14W E27 ES) into lampholder.
8. Locate the front cover of the fitting onto the back cover that was secured to the wall in Step 6 then re-secure using the screws that were removed in step 1.
9. Turn on mains supply to test the fitting.


Step 2
Mark hole positions through fixing hole positions in back cover, typ. 2 pos'ns.

Step 4 & 5
Cut hole in rubber grommet, feed mains cable through & connect to terminal block, see Fig.2 for details.

Step 1
Remove screws used to secure front cover, typ. 2 pos'ns.

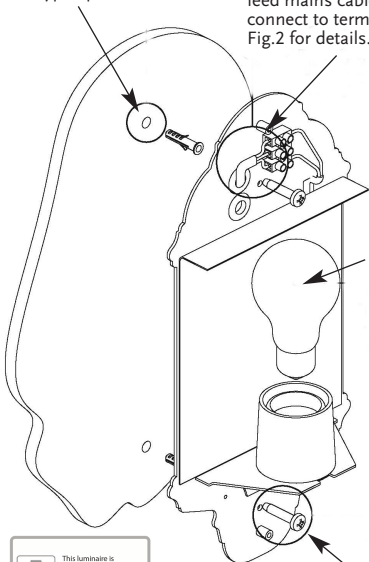

Step 7
Screw lamp (Halogen 42W or CFL 14W E27 ES) into lampholder.

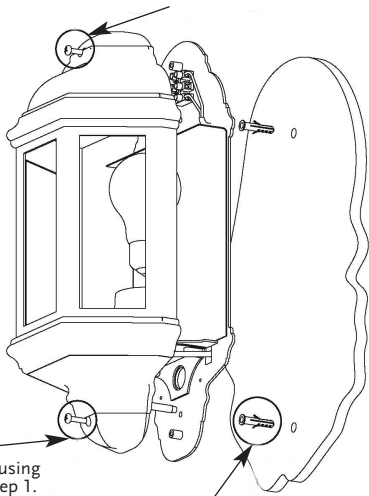

Step 8
Resecure front cover using screws removed in Step 1.


Step 3
Drill holes on the points marked in Step 2, insert rawl plugs, typ. 2 pos'ns.

Step 6
Secure back cover in desired position using holes drilled in Step 3, typ. 2 pos'ns.

This luminaire is compatible with bulbs of the energy classes:

A++
A+
A
B
C
D
E

874/2012



We recommend only branded lamp.
For example: Sylvania, GE, Philips or Osram. ✓

Lamp replacement :
Lamp : Halogen 42W or CFL 14W
Lamp Cap : E27 ES
Max Wattage : 42W
Max. Voltage : 240V 50Hz

TECHNICAL INFORMATION

Supply:	240VAC, 50Hz
IP Rated:	IP44

GUARANTEE

Your KingShield Half Wall Lantern is guaranteed for 12 months from the date of purchase. This is in addition to your statutory rights.

**PLEASE KEEP THESE INSTRUCTIONS
SAFE FOR FUTURE REFERENCE**

**GREEN
BROOK**
ELECTRICAL PLC
WEST ROAD . HARLOW
ESSEX . CM20 2BG . UK
sales@greenbrook.co.uk
WWW.GREENBROOK.CO.UK

