
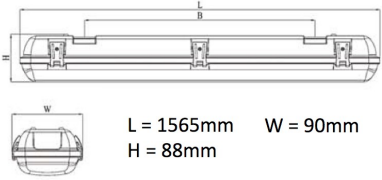


Item Code:	Date	Modified
M5304	05-01-2017	DD-MM-YYYY

Description & Features	Product Image	Line Drawing
5ft (1.5mt) Single Body 30w LED IP65 Non Corrosive Fitting <ul style="list-style-type: none"> ● PC base/PC diffuser ● SMD2835 LED Light source with Tridonic LED Driver. ● 2700lm, 4000K, CRI>80 ● IP65 ● EM version are also available (M5304EM) 		 <p>L = 1565mm W = 90mm H = 88mm</p>

General Specification

Product Dimension	1565mm x 90mm x 88mm	Product Weight	1.5kg
Finish/Color	White base, opal diffuser	Packing Method	Corrugated box
IP Rating	IP65	Energy Rating	A
Dimmable (Yes/No)	No	Warranty	3years

Light Source Specifications

Lumen output	2700lm \pm 5%	Input Voltage	220-240V AC 50Hz
Lumens Per Watt	90lm/W	Input Current	0.15A
CCT (K)	4000K	Input Power	30W
CRI (Ra)	>80	Power Factor	>0.9
Lifetime	30000hrs	Elec. Classification	Class I
Beam Angle	110°	Control Gear Spec	Tridonic 35W 250mA fixC Ip SNC
Type of LED	SMD 2835		

Construction

Fitting body	Polycarbonate	Diffuser	Polycarbonate
--------------	---------------	----------	---------------

Packaging Specifications

Box Dimensions	1575 x 95 x 95mm	Box Weight	2.0kg
----------------	------------------	------------	-------

Installation

Distance to Other Obj.	0.5m	Ambient Temp	-20°C - +40°C
Cut-out Size	N/A	Ceiling Depth	N/A
Fixing Method	Surface mounted, suspension (need extra accessories)		

Certification & Report

CE/LVD	Yes	CE/EMC	Yes
RoHS	Yes	REACH	Declaration
IES/LDT	IES, Yes	Lm-80	Yes
TM-21	Upon request		
Others			