



• Dimensions •

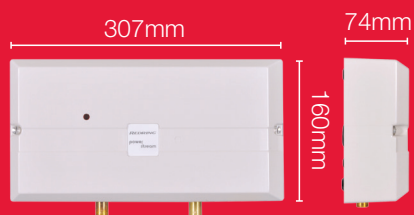

• Accessories •

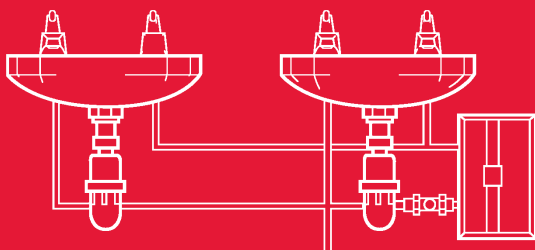

- Suitable for up to two hand basins or one basin and a shower using the RM1 kit
- LT1 ¼ turn lever spray basin taps recommended
- RM1 manual mixer shower accessory kit also available



• Technical Specification •

- Operating water pressure 1-10 bar (15-150psi)
- Water connection -15mm straight shank inlet and outlet pipes
- Recommended cable sizes and fuse ratings:
 - 9.5kW 10mm² 40 Amps
 - 10.8kW 10-16mm² 45 Amps
 - 12kW 16mm² 50 Amps
- Energy Efficiency Class - A



Part No./short code. **Powerstream**

45793201	RP1	Powerstream	9.5kW
45793204	RP10.8	Powerstream	10.8kW
45793202	RP12	Powerstream	12kW

Part No./short code. **Powerstream Eco** (with external power setting selection)

45673201	RP1E	Powerstream Eco	9.5kW
45673202	RP10.8E	Powerstream Eco	10.8kW

Part No./short code. **Powerstream Accessories**

85793616	LT1	¼ turn lever spray taps	(Pair)
85793620	RM1	Manual mixer shower kit	

QR Code Reader app available for download from the iTunes App Store and the Android Market.



Redring
Newcombe House,
Newcombe Way
Orton Southgate
Peterborough PE2 6SE

T: +44 (0) 844 372 7761*

www.redring.co.uk

www.redring.co.uk/powerstream

*Calls cost 7p per minute plus your telephone company's network access charge

R076

Powerstream & Powerstream Eco

Unvented instantaneous water heaters for fast convenient hot water on demand



Redring is a registered trademark of Redring Xpelair Group Ltd (The Company). The Company reserves the right to alter product specification or appearance without prior notice. All finishes and information are accurate at time of printing. All rights reserved.



Powerstream & Powerstream Eco

Powerstream is a compact, mains fed, unvented instantaneous water heater, which offers a fast, convenient source of hot water on demand at the point of use.

Requiring only power and a mains cold water supply, Powerstream avoids any standing heat losses associated with hot water travel via long inefficient pipe runs from a centrally located hot water cylinder, saving valuable space and energy.

Ideal for hand basin supply in commercial and residential applications where access to stored hot water is restricted, Powerstream will share hot water output between two hand basins, or one hand basin and a shower using the optional RM1 mixer accessory kit. They are not suitable for servicing kitchen sinks or baths where larger volumes of higher temperature water are usually required.

All models have thermal cut-out safety protection and are supplied complete with a 15mm compression service isolation valve. Quarter turn lever control spray taps are recommended for optimum performance.

In addition to above, Powerstream Eco 9.5kW and 10.8kW models feature external adjustable power selection to maximise energy efficiency with seasonal water temperature changes.



Powerstream

Powerstream Eco